

# 14GX Heavy Duty Tandem Axle Extra Wide Gooseneck Dump


<b>G.V.W.R.</b>	14,000#	<b>Axles</b>	(2) 7,000# EZ Lube w/Elec. Brakes
<b>G.A.W.R. (Ea. Axle)</b>	7,000#	<b>Supension</b>	Multi-Leaf Spring w/Equalizer
<b>Coupler</b>	2-5/16" Adjustable Pipe	<b>Tire</b>	ST235/80 R-16 Load Range E
<b>Safety Chains</b>	3/8" Grd. 70 w/Safety Latch Hook (2 each)	<b>Wheel</b>	16" x 6"; HD White Mod 8 Bolt
<b>Jack</b>	Dual 12,000# Side Wind Drop Legs	<b>Floor</b>	10 Gauge Smooth Steel
<b>Neck</b>	10" I-Beam	<b>Lights</b>	L.E.D. D.O.T. Stop, Tail, Turn & Clearance
<b>Frame</b>	8" x 3" Rectangular Tubing	<b>Elec. Plug</b>	7-Way RV
<b>Crossmembers</b>	8" Channel	<b>Finish (Prep)</b>	Steel is Cleaned to Ensure a Professional Smooth Finish.
<b>Bed Crossmembers</b>	3" Channel		
<b>Bed Long Sils</b>	3" Channel	<b>Finish</b>	Superior Quality Finish is Applied for a Highly Decorative and Protective Finish.
<b>Bed Side Rails</b>	6-1/2" Formed Angle		
<b>Fenders</b>	Double Square Broke Diamond Plate		

## Standard Features

- Lockable Pump & Battery Box Mounted in Front of Bed
- J-Hooks for Tie Down
- Fully Formed Shroud for Tarp
- Self Contained Electric/Hydraulic Scissor Lift
- 45 Degree Dump Angle
- Combo Gate
- 24", 12 Ga. Sides
- 10 Ga. Floor
- Stake Pockets (Sides)
- EZ Lube Hubs
- Dexter Brand Axles
- 110V Charger
- (4) 5/8" D-Rings Inside Bed
- Nev-R-Adjust Electric Brakes
- Cambered Axles
- Spare Tire Mount
- Diamond Plate Fenders
- Grommet Mount Sealed Lighting
- L.E.D. Lighting Package
- Protected Wiring
- Complete Break-A-Way System w/Charger
- Radial Tires
- 2" Square Tubing Top Rail
- Crank Style Roll Tarp- Standard Equipped

## Description

Weights & Capacities			
Length	Empty Weight	Payload	Box Capacity
14GX-14	4,400#	9,600#	7.2 Cubic Yards
14GX-16	4,700#	9,300#	8.3 Cubic Yards

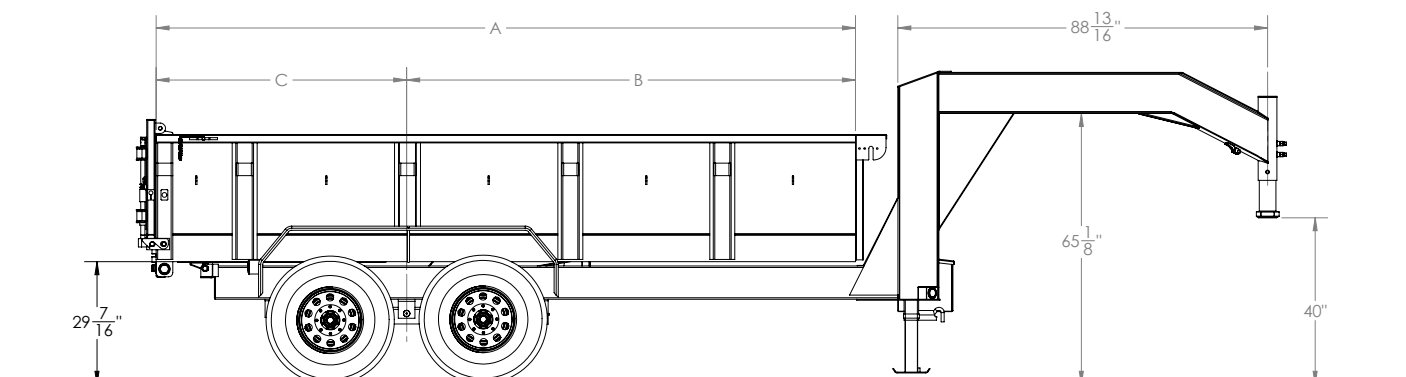

\*Weights and cargo capacities shown are for base models without options and are estimates only

# 14GX Heavy Duty Tandem Axle Extra Wide Gooseneck Dump



Model	Weight*	Description
14GX-14	4,400#	83" x 14' Heavy Duty Tandem Axle Gooseneck Dump
14GX-16	4,700#	83" x 16' Heavy Duty Tandem Axle Gooseneck Dump

\*Weights shown are for base models without options and are estimates only

## Optional Equipment

Category	Description
COUPLERS	30,000# Square Adjustable Screw Type Coupler
JACKS	Dual 2-Speed Landing Gear
TIRE/WHEEL	Spare Tire (ST235/80 R-16 LR-E)
TIRE/WHEEL	Tire Upgrade (ST235/85 R-16 LR-G)
TIRE/WHEEL	Spare Tire Upgrade (ST235/85 R-16 LR-G)
RAMPS	7' Slide In Ramps
POWER	Wireless Remote
POWER	5 Watt Solar Charger
BODY	24" Expanded Metal Side Extensions (14')
BODY	24" Expanded Metal Side Extensions (16')
BODY	3' Solid Sheet Metal Sides (14')
BODY	3' Solid Sheet Metal Sides (16')
BODY	4' Solid Sheet Metal Sides (14')
BODY	4' Solid Sheet Metal Sides (16')
BODY	Removable Deck on the Neck- Bolt On (8' W x 6' L)