


<b>G.V.W.R.</b>	30,000#	<b>Axle</b>	(2) 12,000# Heavy Duty Dual Wheel Axles - Oil Bath; Electric Brakes (ED) or Air Brakes (AD)
<b>G.A.W.R. (Ea. Axle)</b>	12,000#	<b>Supension</b>	44K Adjustable
<b>Coupler</b>	60,000#, 3" ID Pintle Eye	<b>Tire</b>	ST235/80 R-16 Load Range G
<b>Safety Chains</b>	1/2" Grd. 80 w/Safety Latch Hook (2 each)	<b>Wheel</b>	16 x 6 Dual 8 Bolt
<b>Jack</b>	12K TW Drop Leg Jack	<b>Floor</b>	2" Nominal Oak (S4S)
<b>Tongue</b>	Integral w/Frame	<b>Lights</b>	L.E.D. D.O.T. Stop, Tail, Turn & Clearance
<b>Top Rail</b>	None	<b>Elec. Plug</b>	7-Way RV
<b>Frame</b>	12" - 22# I-Beam	<b>Finish (Prep)</b>	Steel is Cleaned to Ensure a Professional Smooth Finish.
<b>Crossmembers</b>	6" Jr. I-Beam on 16" Centers	<b>FINISH</b>	Superior Quality Finish is Applied for a Highly Decorative and Protective Finish.
<b>Side Rails</b>	8" Channel		

## Standard Features

- 3 Position Pintle Adjustment
- Storage Area in Tongue
- Modular Sealed Wiring Harness
- Bolt On Jack
- Safety Reflective Marker Tape
- 102" Wide
- Low Profile Bed
- 2 Side Bed Steps
- Oak Flooring
- 6 - 5/8" O.D. D-Rings
- 12-1/4 x 4 HD Brakes; Electric has complete Break-A-Way System and Air has Automatic Slack Adjusters, Spring Brakes and ABS
- 5' Dove Tail w/Double Hinged Spring Assist Ramps
- Grommet Mount Sealed LED Lighting

## Description

Dimensions			
Length	A	B	C
20' + 5'	300"	113"	187"
24' + 5'	348"	137"	211"

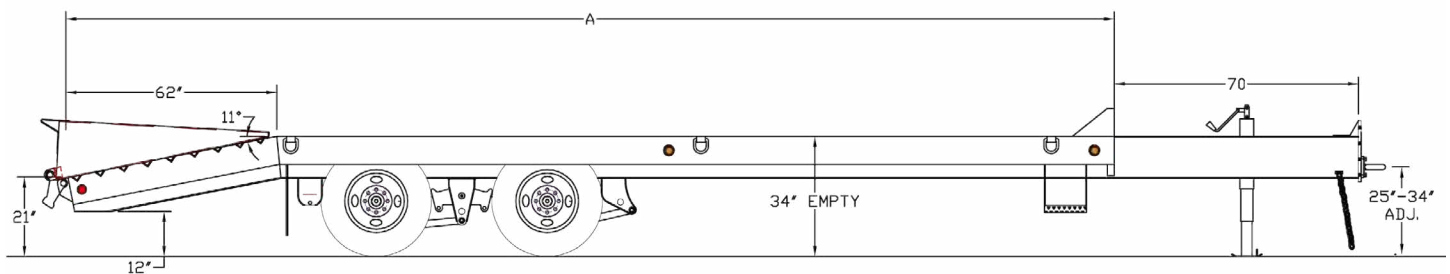

# 24ED/AD Pintle Equipment Transport ●



Model	Weight*	Description
*24ED-20+5	5,900#	102" x 20' + 5' Tandem Dual 30,000# Pintle w/Electric Brakes
*24ED-24+5	7,020#	102" x 24' + 5' Tandem Dual 30,000# Pintle w/Electric Brakes
*24AD-20+5	6,100#	102" x 20' + 5' Tandem Dual 30,000# Pintle w/Air Brakes
*24AD-24+5	6,300#	102" x 24' + 5' Tandem Dual 30,000# Pintle w/Air Brakes

\*Weights shown are for base models without options and are estimates only

## Optional Equipment

Category	Description
JACKS	Single 2 Speed Drop Leg Jack
JACKS	Dual Single Speed Drop Leg Jacks
JACKS	Dual 2 Speed Landing Gear Jacks (50K)
TIRE/WHEEL	Spare Tire (ST235/80 R-16 LR-G Dual)
TIRE/WHEEL	Tire Upgrade (ST215/75 R-17.5 LR-H Dual)
TIRE/WHEEL	Spare Tire Upgrade (ST215/75 R-17.5 LR-H Dual)
TIRE/WHEEL	Vertical Spare Mount
BODY	Lockable Lid Cover Tool Storage in Tongue
CARGO CONTROL	Extra 5/8" D- Ring (Each)

**\* Trailer is subject to Federal Excise Tax**